


POWER PACK 2000

ENGINE	CUMMINS	QSK60-G4
ALTERNATOR	MECCALTE	ECO 46-1L
ENGINE SPEED	1500	RPM
POWER	3PH 50HZ	2000KVA

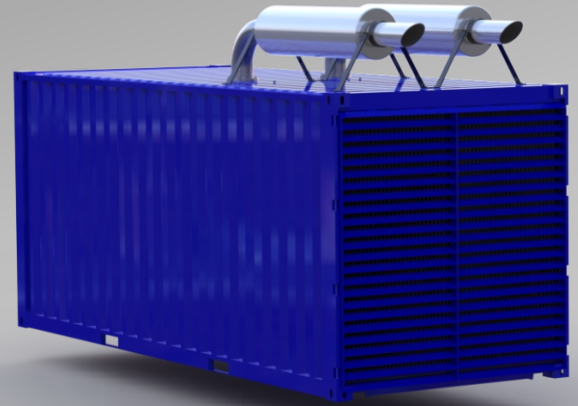

ENGINE	CUMMINS
FUEL	DIESEL
GOVERNER	ELECTRONIC GOVERNED
CYLINDERS	V16
ASPIRATION	TURBO CHARGED INTER COOLED
DISPLACEMENT	60.2 L
COOLING SYSTEM	WATER COOLED
EMISSION	EU STAGE II
ENGINE POWER STANDBY	1915 KWM @ 1500 RPM
ENGINE POWER PRIME	1730 KWM @ 1500 RPM

ALTERNATOR	MECCALTE ECO 46-1L
BASELOAD POWER	2100 KVA; 50HZ; 3PH @ 40°C
CONTINUOUS POWER	2100 KVA; 50HZ; 3PH @ 40°C
STAND BY POWER	2250 KVA; 50HZ; 3PH @ 40°C
VOLTS	AVR CONTROLLED 380-415V-BROAD VOLTAGE
EXECUTION	BRUSHLESS
OVERLOAD (LONG TERM)	1 HOUR IN A 6 HOUR PERIOD @110% RATED

WWW.NEWTONTTECHPOWER.CO.ZA

602 MOOPLAATS
PRETORIA

TEL +27 (0) 824432297
FAX +27 (0) 866111090

SALES@NEWTONTTECHPOWER.CO.ZA

FUEL CONSUMPTION	
50% OF PRIME POWER	200 L/PH
75% OF PRIME POWER	291 L/PH
PRIME POWER	394 L/PH