


POWER PACK 35

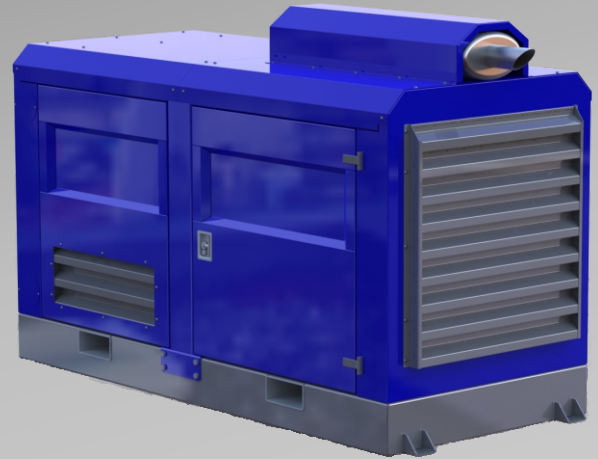

ENGINE	CUMMINS	X3.3-G1
ALTERNATOR	MECCALTE	EC032-2S/4
ENGINE SPEED	1500	RPM
POWER	3PH 50HZ	35KVA

ENGINE	CUMMINS
FUEL	DIESEL
GOVERNER	MECHANICALLY GOVERNED
CYLINDERS	4
ASPIRATION	NORMAL
DISPLACEMENT	3.3 LITRES
COOLING SYSTEM	WATER COOLED
EMISSION	EU STAGE II
ENGINE POWER STANDBY	36 KWM @ 1500RPM
ENGINE POWER PRIME	32 KWM @ 1500 RPM

ALTERNATOR	MECCALTE EC032-2S/4
BASELOAD POWER	35 KVA; 50HZ; 3PH @ 40°C
CONTINUOUS POWER	35 KVA; 50HZ; 3PH @ 40°C
STAND BY POWER	38.5 KVA; 50HZ; 3PH @ 40°C
VOLTS	AVR CONTROLLED 380-415V-BROAD VOLTAGE
EXECUTION	BRUSHLESS
OVERLOAD (LONG TERM)	1 HOUR IN A 6 HOUR PERIOD @110% RATED

FUEL CONSUMPTION	
50% OF PRIME POWER	4.3 L/PH
75% OF PRIME POWER	6.1 L/PH
PRIME POWER	8.5 L/PH

WWW.NEWTONTTECHPOWER.CO.ZA

602 MOOPLAATS
PRETORIA

TEL +27 (0) 824432297
FAX +27 (0) 866111090

SALES@NEWTONTTECHPOWER.CO.ZA