


POWER PACK 600

ENGINE	CUMMINS	VTA28-G5
ALTERNATOR	MECCALTE	ECO 40-1.5L
ENGINE SPEED	1500	RPM
POWER	3PH 50HZ	620KVA

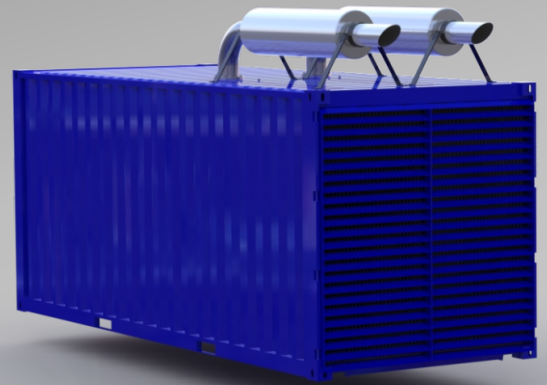

ENGINE	CUMMINS
FUEL	DIESEL
GOVERNER	ELECTRONIC GOVERNED
CYLINDERS	V12
ASPIRATION	TURBO CHARGED INTER COOLED
DISPLACEMENT	28 L
COOLING SYSTEM	WATER COOLED
EMISSION	EU STAGE II
ENGINE POWER STANDBY	615 KWM @ 1500 RPM
ENGINE POWER PRIME	560 KWM @ 1500 RPM

ALTERNATOR	MECCALTE ECO 40-1.5L
BASELOAD POWER	620 KVA; 50HZ; 3PH @ 40°C
CONTINUOUS POWER	620 KVA; 50HZ; 3PH @ 40°C
STAND BY POWER	682 KVA; 50HZ; 3PH @ 40°C
VOLTS	AVR CONTROLLED 380-415V-BROAD VOLTAGE
EXECUTION	BRUSHLESS
OVERLOAD (LONG TERM)	1 HOUR IN A 6 HOUR PERIOD @110% RATED

FUEL CONSUMPTION	
50% OF PRIME POWER	75 L/PH
75% OF PRIME POWER	105 L/PH
PRIME POWER	145 L/PH

WWW.NEWTONTECHPOWER.CO.ZA

602 MOOPLAATS
PRETORIA

TEL +27 (0) 824432297
FAX +27 (0) 866111090

SALES@NEWTONTECHPOWER.CO.ZA